



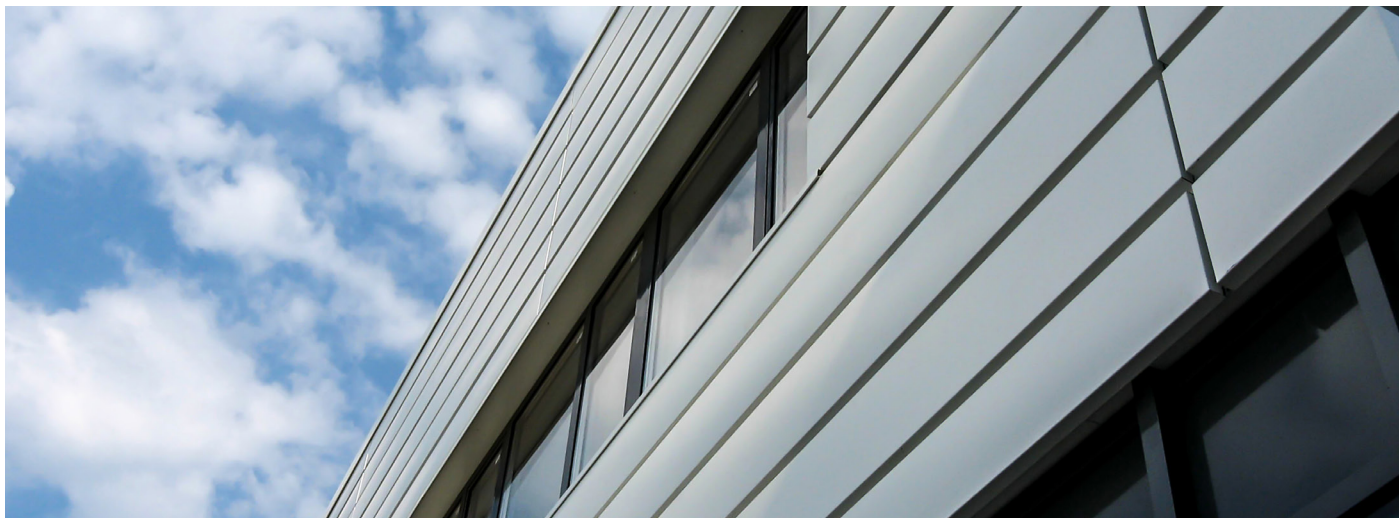

The façade cassettes are among the various technologies and finishing materials of the construction, which are used to cover the exterior walls, combining structural strength with a modern finish.

Schlebach façade cassettes - technical characteristics

Material	Pre-painted steel sheet			
Available thickness (mm)	0.50 0.55 0.60			
Steel class	minimum S250GD			
Minimum zinc coverage (g/m²)	275			
Exterior paint coating (µm)*	SP L	SP MAT	PVDF	PUR NOVA
	25	35	25	55
RUV/RC	RUV2/RC2	RUV4/RC4	RUV4/RC4	RUV4/RC5
Total width (mm)	252 355 565			
Useful width (mm)	212 315 525			
Weight (kg/m²)	4.8 - 7.1			
Minimum length (mm)**	800			
Maximum length - recommended (mm)	2000			
Corrugation height (mm)	20			

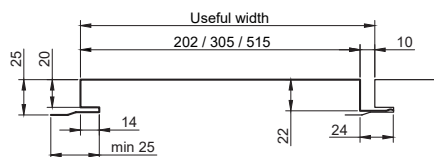


The values in sections are expressed in mm.

*SP L - Glossy Polyester
SP MAT - Supet Matte Polyester
PVDF - Polyvinylidene fluoride
PUR NOVA - Mat Polyurethane

**The minimum length of type 1 facade cassettes is 800 mm, but cassettes with a minimum length of up to 500 mm can be manufactured without making their closing sides.

Steel type and structure

Minimum steel class S250GD steel with **275 g/m²** Zinc coating, according to EN 10346 and EN 10143.

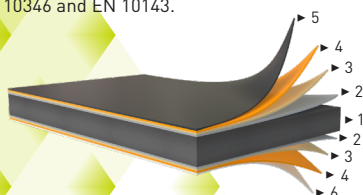

- 1 ▶ Steel
- 2 ▶ Zinc coating
- 3 ▶ Passivation coating
- 4 ▶ Primary protection coating
- 5 ▶ Exterior paint coating
- 6 ▶ Interior paint coating

- Optimized**
- Lightweight**
- Adaptable**
- Easy fitting**
- Extended lifespan**
- Sustainable**