





Metigla TR8 profiled metal sheet is a quick solution for the construction of façades, ceilings or fences.

TR8 façade - technical characteristics

Material	Pre-painted steel sheet			
Available thickness (mm)	0.50 0.60			
Steel class	minimum S250GD			
Minimum zinc coverage (g/m ²)	275			
Exterior paint coating (µm)*	SP L	SP MAT	PVDF	PUR NOVA
	25	35	25	55
RUV/RC	RUV2/RC2	RUV4/RC4	RUV4/RC4	RUV4/RC5
Total width (mm)	1200			
Useful width (mm)	1170			
Weight (kg/m ²)	3.8-6.5			
Minimum length** (mm)	1500			
Maximum length - recommended (mm)	5800			
Corrugation height (mm)	8			

*SP L - Glossy Polyester
 SP MAT - Super Matt Polyester
 PVDF - Polyvinylidene fluoride
 PUR NOVA - Mat Polyurethane


**For lengths below 1500 mm we have an additional cutting charge.

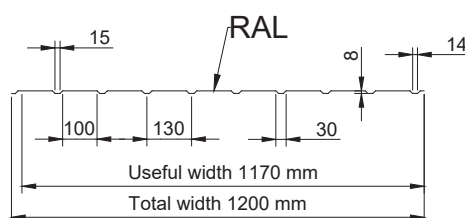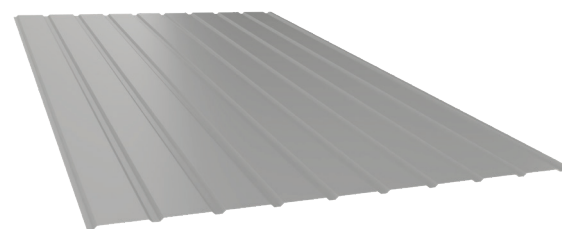

The values in sections are expressed in mm.

Steel type and structure

Minimum S250GD steel with **275 g/m²** zinc coating, according to EN 10346 and EN 10143.



- 1 ▶ Steel
- 2 ▶ Zinc coating
- 3 ▶ Passivation coating
- 4 ▶ Primary protection coating
- 5 ▶ Exterior paint coating
- 6 ▶ Interior paint coating

- Optimized**
- Lightweight**
- Adaptable**
- Easy fitting**
- Extended lifespan**
- Sustainable**