


Holes layout


Available diameter	7 mm	10 mm	11 mm	13 mm	15.5 mm	18 mm	20 mm
Number of holes possible on the profile height	2 holes	2 holes	2 holes	4 holes	4 holes	4 holes	2 holes

The holes layout is possible on maximum 4 axes respecting the minimum distance between holes of different diameters:

Drilling diagram for Z profiles

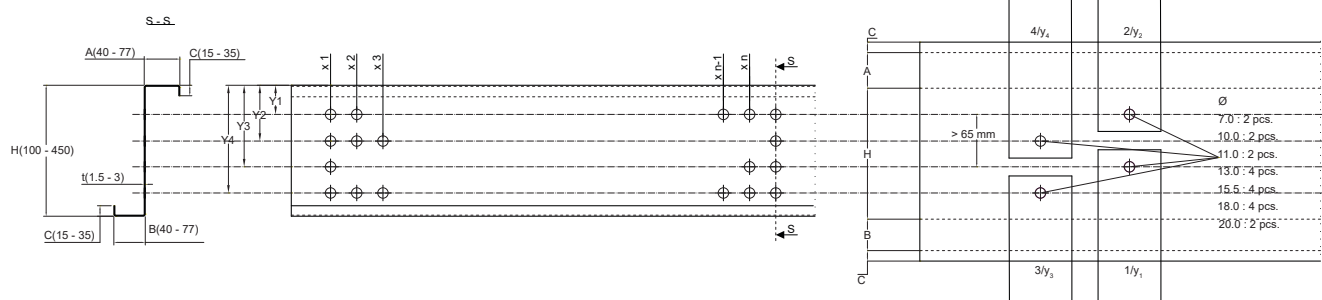


Drilling diagram of C profiles

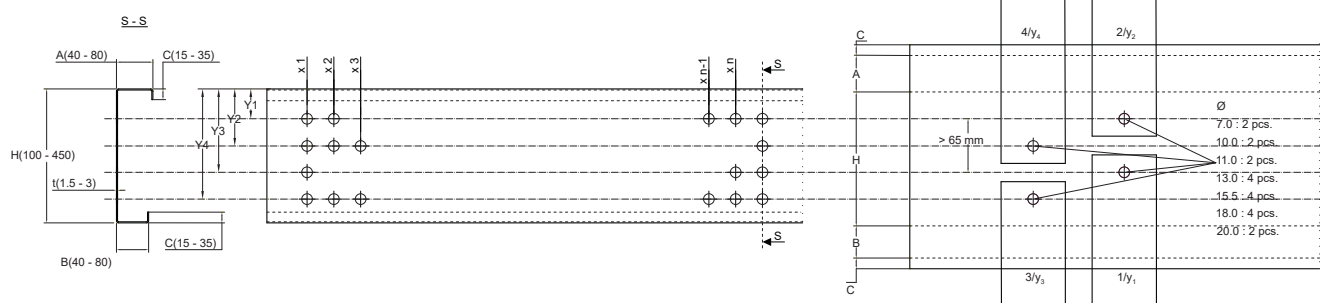


Possible dimensions

C, Z, U and L galvanized profiles dimensions:


C profile




Z profile



U profile



L profile



C profiles admissibility

H	A-B	C
100 ÷ 109	40 ÷ 49	15 ÷ 20
100 ÷ 109	50 ÷ 59	15 ÷ 25
100 ÷ 109	60 ÷ 70	15 ÷ 35
100 ÷ 109	71 ÷ 80	15 ÷ 30
110 ÷ 450	40 ÷ 49	15 ÷ 20
110 ÷ 450	50 ÷ 59	15 ÷ 25
110 ÷ 450	60 ÷ 80	15 ÷ 35

Z profiles admissibility

H	A-B	C
110 ÷ 450	40 ÷ 49	15 ÷ 20
110 ÷ 450	50 ÷ 59	15 ÷ 25
110 ÷ 450	60 ÷ 70	15 ÷ 35
100 ÷ 109	71 ÷ 77	15 ÷ 30
110 ÷ 450	71 ÷ 77	15 ÷ 35