

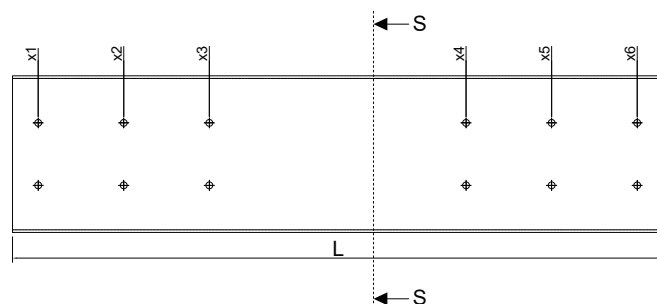




Galvanized U profiles are used for main or secondary structures, beams and intermediate floors of all types of buildings: industrial or residential, commercial, agricultural, halls or warehouses. All galvanized profiles are custom-made, with the possibility of a variety of perforations.



The values in sections are expressed in mm

U profiles - technical characteristics

Material	Galvanized steel
Available thickness (mm)	1.5 - 3
Weight (kg/m ²)	12 - 24
Steel class	S 350 GD
Minimum zinc coverage (g/m ²)	275
Minimum length* (mm)	2000
Maximum length - recommended (mm)	13500

*Profiles with lengths below 2000 mm should be included in other orders, then cut to length.

- High load-bearing capacity
- Lightweight
- Extended lifespan
- Easy fitting
- Sustainable

Loads

Product name	Thickness T (mm)	Height H (mm)	Small side (mm)	Big side (mm)	Load (kg/ml)
U 115/40x44	2	115	40	44	3.072
U 145/40x44	2	145	40	44	3.552
U 175/48x52	2	175	48	52	4.288
U 195/48x52	2	195	48	52	4.608
U 245/57x64	2	245	57	64	5.744
U 295/62x68	2	295	62	67	6.672
U 395/67x74	2	395	67	74	8.464