




TC15 profiled metal sheet is a quick solution for covering industrial, commercial or residential buildings and is recommended for the construction of roofs.

TC15 roof - technical characteristics

Material	Pre-painted steel sheet			
Available thickness (mm)	0.50 0.60			
Steel class	minimum S250GD			
Minimum zinc coverage (g/m ²)	275			
Exterior paint coating (μm)*	SP L	SP MAT	PVDF	PUR NOVA
	25	35	25	55
RUV/RC	RUV2/RC2	RUV4/RC4	RUV4/RC4	RUV4/RC5
Total width (mm)	1195			
Useful width (mm)	1110			
Weight (kg/m ²)	4.4 - 5.2			
Minimum length** (mm)	1500			
Maximum length - recommended (mm)	6000			
Corrugation height (mm)	14			

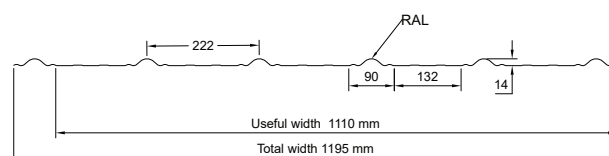


The values in sections are expressed in mm

*SP L - Glossy Polyester
SP MAT - Super Matt Polyester
PVDF - Polyvinylidene fluoride
PUR NOVA - Mat Polyurethane

**For lengths below 1500 mm we have an additional cutting charge.

Steel type and structure

Minimum steel class S250GD with 275 g/m² zinc coating, according to EN 10346 and EN 10143.

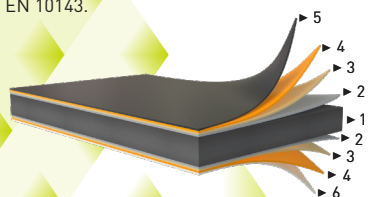

- 1 ▶ Steel
- 2 ▶ Zinc coating
- 3 ▶ Passivation coating
- 4 ▶ Primary protection coating
- 5 ▶ Exterior paint coating
- 6 ▶ Interior paint coating

- Optimized
- Lightweight
- Adaptable
- Easy fitting
- Extended lifespan
- Sustainable